



Ensure that products are mounted with supplied, recommended or appropriate screws and fixings to suit the mounting surface.

WARNING

INSTALLATION IS ONLY TO BE CARRIED OUT BY SUITABLY QUALIFIED PERSONS IN ACCORDANCE WITH INSTALLATION INSTRUCTIONS AND ALL APPLICABLE REGULATIONS OR STANDARDS. (IMPROPER INSTALLATION CAN CREATE AN ELECTRICAL HAZARD WITH RISK OF ELECTRIC SHOCK, FIRE OR INJURY). DARKON WILL NOT BE HELD RESPONSIBLE FOR ANY CONSEQUENCES ARISING FROM IMPROPER PRODUCT HANDLING, STORAGE OR INSTALLATION.

TOOLS REQUIRED

POWER DRILL / DRILL BIT / PHILLIPS DRIVER / PENCIL / TAPE MEASURE
ALLEN KEY / PLUM LASER

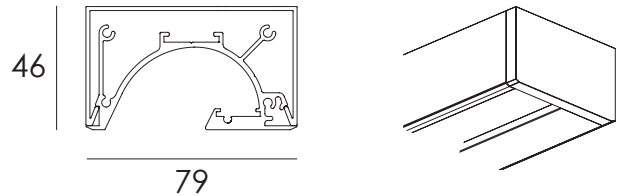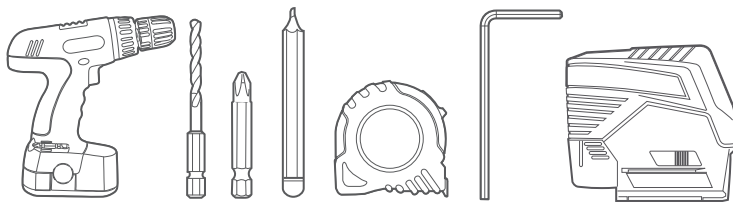

MAINTENANCE




Wipe product with a clean dry microfiber cloth.
Do not use any cleaning products/ chemicals to clean product.

SERVICING


'Remote Driver' can be replaced if deemed faulty

COMPONENTS

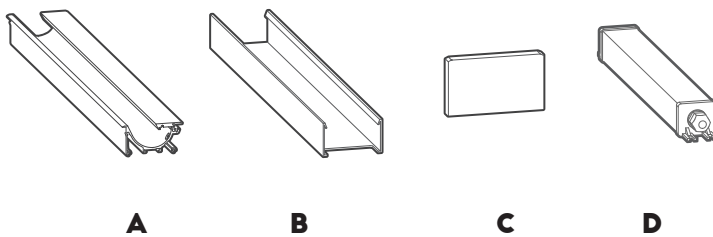

ORIENTATION

Ensure luminaire is correctly orientated to produce designed light direction.

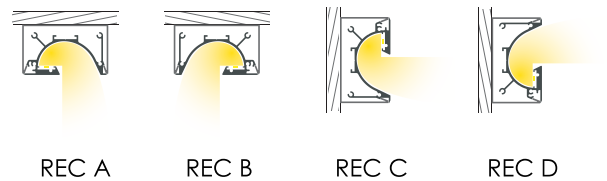



	DISTANCE	DESCRIPTION
A)	148MM	MOUNTING LOCATION
B)	PROFILE LENGTH 2	IF GREATER THAN 2.2M THIRD SUSPENSION POINT IS REQUIRED
C)	21MM	PF LOCATION

CRITICAL DIMENSIONS


FIGURE 1.

FOR OPTIMAL LONGEVITY, ENSURE UNRESTRICTED AIRFLOW OVER LUMINAIRE & REMOTE DRIVER.
DO NOT COVER LUMINAIRE OR DRIVER WITH INSULATION. DO NOT STACK DRIVERS.

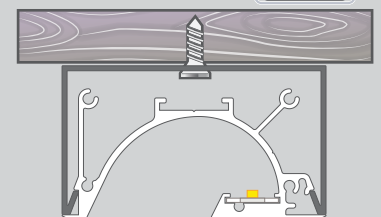


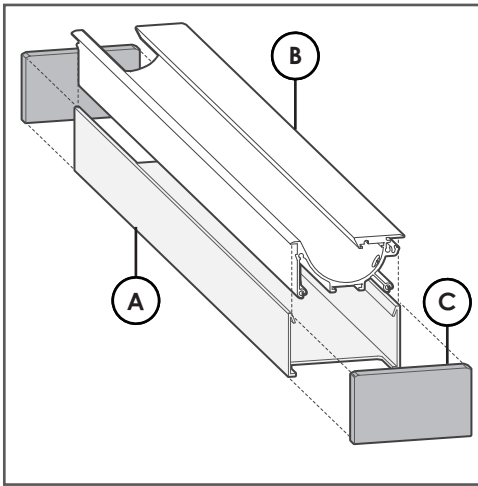


1. Unassemble fitting by removing endcap(C) from mainbody(A). Remove mainbody(A) from Surfacebody(B).

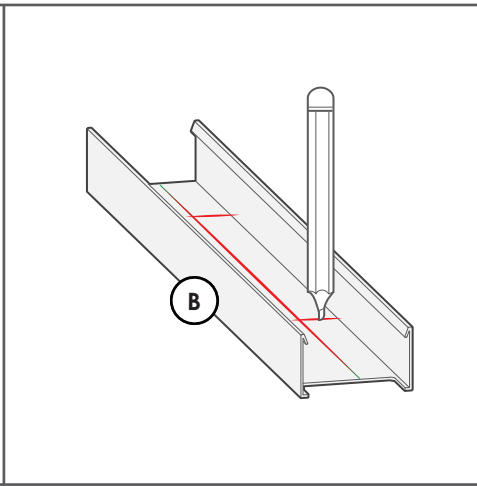


2. Mark mounting holes on 'Surfacebody' (B). Refer to figure 1 for critical dimensions.

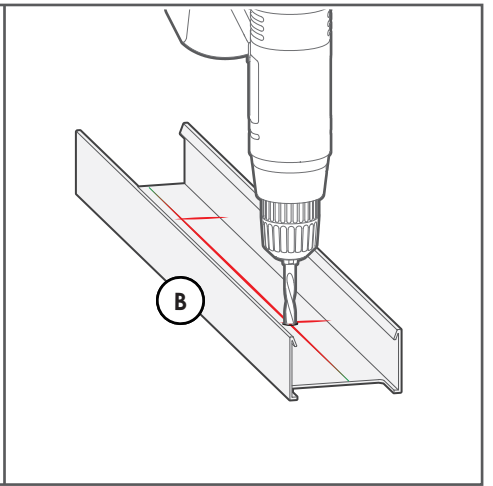


3. Drill appropriate sized holes on 'Surfacebody' (B).

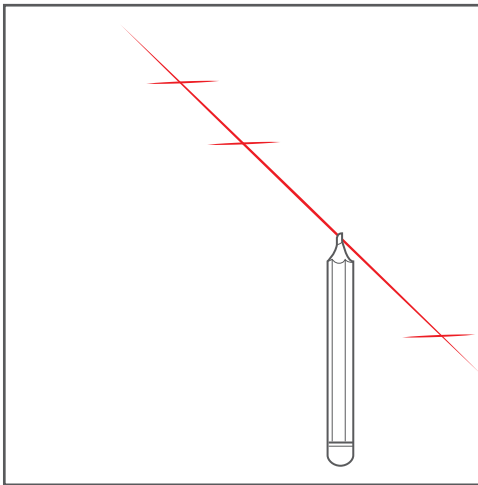


4. Project line using laser plumb and mark necessary mounting points using figure 1 as reference.

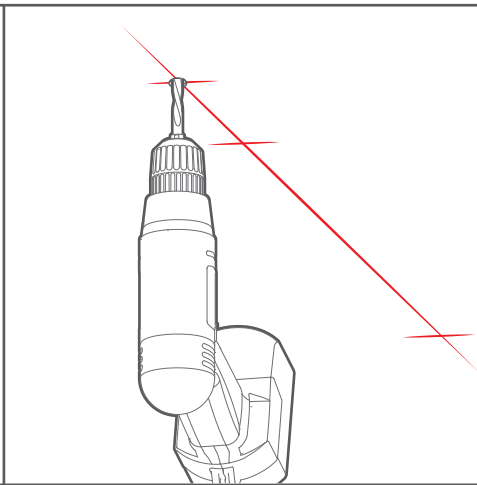


5. Drill all necessary powerfeed & pilot holes.

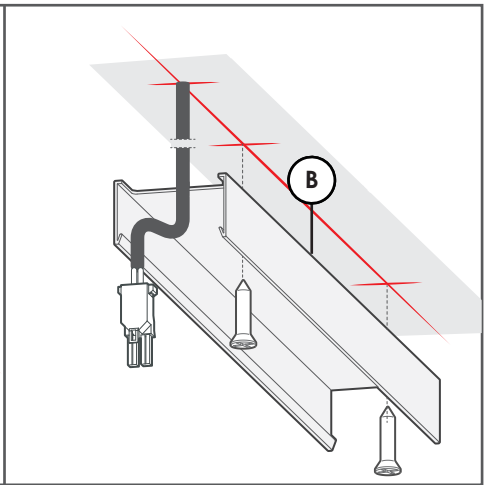


6. Pull secondary wires through ceiling & clearance in backbox. Fix surfacebody(B) onto the ceiling with suitable fasteners (not supplied).

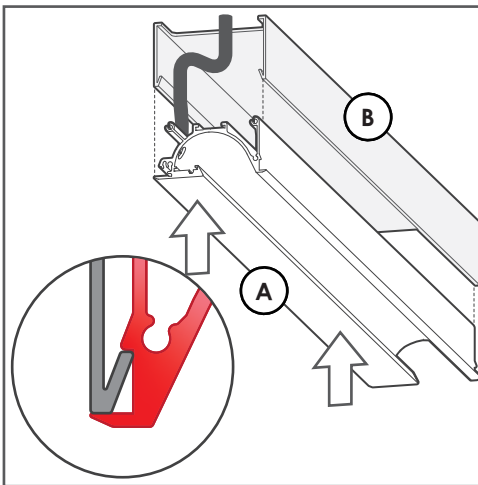

7. Pull secondary wires through ceiling & clearance in backbox. Fix surfacebody(B) onto the ceiling with suitable fasteners (not supplied).

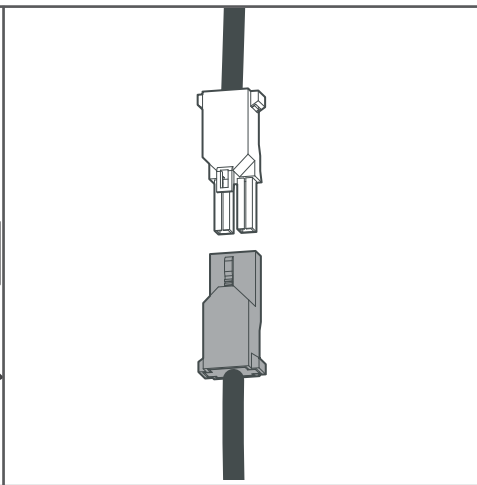

8. Connect appropriate plugs.

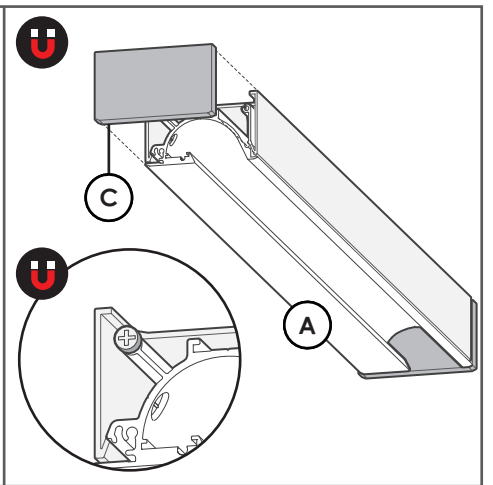

9. Install End Caps(C) onto its specific side. Align magnets onto the screw head.