



ILLUMINATING CONNECTIONS



www.luxconex.com

Find us on luxconex



SR Contour Lights

Watch Video

SR CONTOUR LIGHTS



Louis Vuitton, Korea
Lighting Design: L'Observatoire Int'l
Facade Contractor: Permasteelisa Group
Contour Light LM10T



Melbourne Int. Flower & Garden Show,
Design: Christian Jenkins
Landscape Design
Contour Light LM20 IP68



David Jones Headquarters, Melbourne
Lighting Design: Rudds Consulting Engineers
Architect: Gray Puksand
Contour Light LM20

LED SHIELD™ Technology

Eliminates segment blackout when there is a single LED package damaged due to inappropriate external force applied during installation and handling

Robust & Accredited

Functions under extreme conditions up to 65°C with our efficient thermal dissipation design, tested to TUV standards and RCM compliant

Homogeneous

The entire Contour Light family is completely dot-free, offering the highest uniformity, seamless illumination even at joins for design continuity

Reliable LED

From world-renowned brands within 3-step McAdam tolerance, housed in silicone, not PVC or polyurethane to ensure consistent and lasting light output

Variety of Form Factors

3-sided illumination, small bend radius and bend direction options targeting different application design intents

Diversity of Colour and CCT

Dynamic white, RGB, RGBW and pixel control offers flexibility in lighting design

As an international lighting manufacturer, headquartered in Singapore, we focus on serving architects and lighting designers around the world. Today, our specification market covers Singapore, Southeast Asia, Korea, Hong Kong, Macau, Australia, New Zealand, Middle East, New York and the United Kingdom.

represents our luminaires. The Contour Light family is suitable for outlining or highlighting applications and is designed for indoor and outdoor installation. We also have a comprehensive array of modular downlights with multiple form factors and beam angles.




CONT H LM0H/LM01/LM02/LM03

PRODUCT	W/m	lm/m (3000K)	COLOUR
LM0H	3	95	2200K, 2400K, 2700K, 3000K, 4300K, 5500K
LM01	6	190	Fixed Red, Green, Blue, Yellow RGB
LM02	9.6	300	
LM03	12	380	

BEND RADIUS 6cm

IP RATING IP44/67/68





CONT V LM06/LM10

PRODUCT	W/m	lm/m (3000K)	COLOUR
LM06	6	475	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6500K
LM10	12	950	Fixed Red, Green, Blue, Yellow RGB, RGBW

BEND RADIUS 10cm

IP RATING IP44/67/68

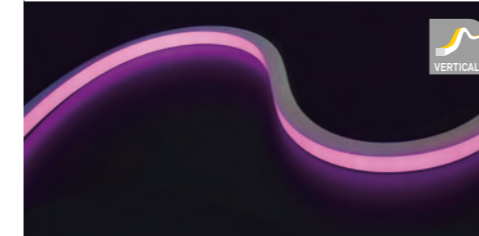


CONT V LM10T

PRODUCT	W/m	lm/m (3000K)	COLOUR
LM10T	12	860	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6500K

BEND RADIUS 10cm

IP RATING IP44/67/68





CONT H FS09/FS15

PRODUCT	W/m	lm/m (3000K)	COLOUR
FS09	9.6	480	2200K, 2400K, 2700K, 3000K, 4300K, 5500K
FS15	15	750	Dynamic White

BEND RADIUS 10cm

IP RATING IP44/67/68

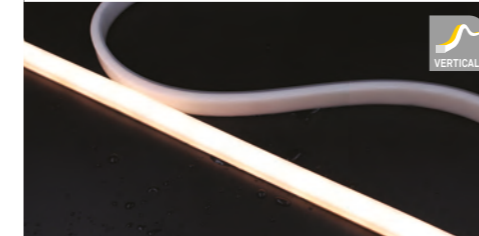


CONT V LM20

PRODUCT	W/m	lm/m (3000K)	COLOUR
LM20	24 (RGB, RGBW)	1850	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6500K

BEND RADIUS 12cm

IP RATING IP44/67/68





CONT V SLIM

PRODUCT	W/m	Ra90+ lm/m (3000K)	Ra80+ lm/m (3000K)	COLOUR
SLIM NJ02	2.4	148	180	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6500K
SLIM NJ04	4.8	295	360	Fixed Red, Green, Blue, Yellow
SLIM NJ07	7.2	425	515	
SLIM NJ09	9.6	562	685	
SLIM NJ12	12	697	850	

BEND RADIUS 8cm

IP RATING IP44/67

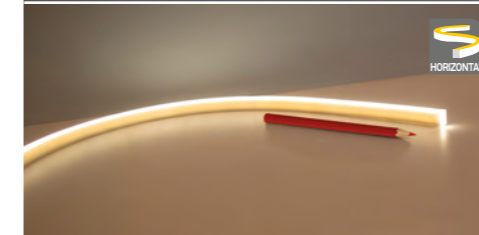



CONT H MINI

PRODUCT	W/m	Ra90+ lm/m (3000K)	Ra80+ lm/m (3000K)	COLOUR
MINI GL	9	225	275	2200K, 2400K, 2700K, 3000K, 4300K, 5500K

BEND RADIUS 3cm

IP RATING IP44/67

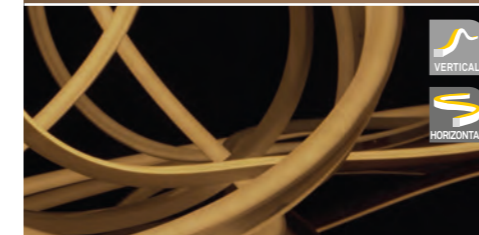

CONT PIXEL CONTROLLED - MUSIC & EFFECTS

PRODUCT	W/m	COLOUR
FS10 SPI PX monochromatic	10.5	2200K, 2400K, 2700K, 3000K, 4000K, 5000K, 6500K
FS15 SPI PX RGB	14.7	Fixed Red, Green, Blue, Yellow RGB
LM10T SPI PX monochromatic	10.5	
LM10T SPI PX RGB	17	

BEND RADIUS 10cm

IP RATING IP67

