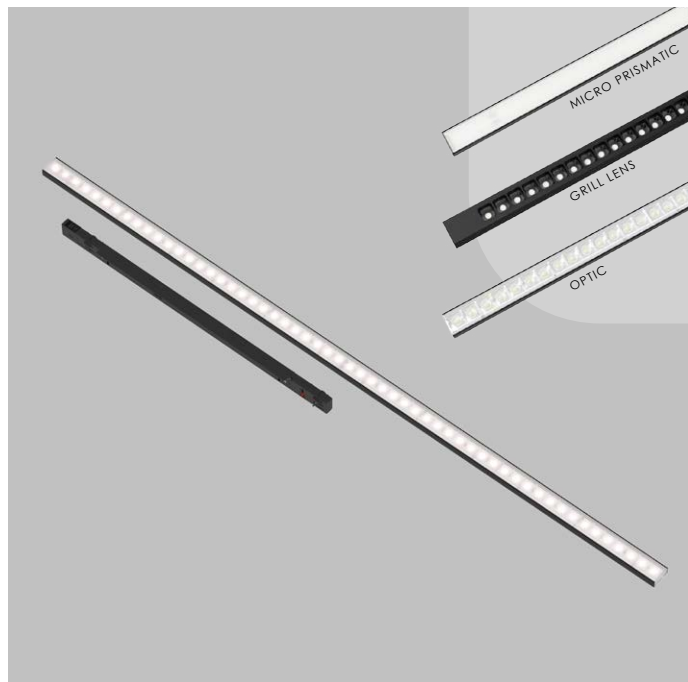



DESIGN FEATURES

- Wide array of beam angles with optic lens option
- Track compatibility with Global / Stucchi / Eutrac / Powergear
- DIP switch selectable between multiple fixed output options
- DIP switch selectable between multiple colour temperatures
- Up to 180 exit lumens per watt
- 80+ or 90+ colour rendering
- High colour tolerance Macadam 3
- L90B10 50,000hrs / L80B10 >80,000hrs / 25° Ta
- Complies with AS/NZS 60598.2.1
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

LUMEN PERFORMANCE

BRIDGELUX LED

1124: 10/34 W 3240/6120 lm

SYSTEM WATTAGE / EXIT LUMENS 4000K

OPTIONS

- SIZE:** 1124
- COLOUR:** White / Black
- LENS:** Optic / Grill / Micro Prismatic 87°
- COLOUR TEMP:** 3000K / 4000K / 5000K [DIP Selectable]
- OPTIC:** 60° / 90° / Double Asymmetric 25°
- DIMMING:** Non Dim [DIP Selectable Power 1 - 5]

Beam angles for optic lens option only