
# 3D1617 NEON FLEXIBLE SILICONE LED







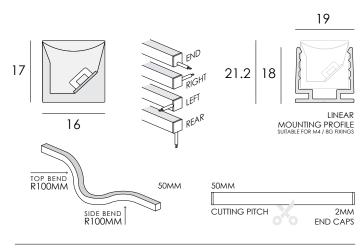

## **DESIGN FEATURES**

- In-house length customisation
- In-house moulded end caps
- IP67 ingress protection
- Minimum bend radius of 100mm [200mm diameter] Top Bend
- Minimum bend radius of 100mm [200mm diameter] rop bend
   Minimum bend radius of 100mm [200mm diameter] Side Bend
- Vertical & Horizontal bending in relation to illuminated face
- Dot free homogeneous illumination
- Single sided diffused illumination
- Dust free matt finish
- Multiple fixed output options
- Up to 81.2 exit lumens per system watt
- 90+ colour rendering
- Max length of 5m with single power feed

- Max length of 10m with single power feed
- Clipping profile produced in 1 & 2m lengths
- UV protected
- Saltwater and solvent resistant
- Complies with AS/NZS 60598.2.1
- 3 year warranty
- Project specific labelling referencing type numbers
- 50,000 hrs lifetime
- L70B50 > 50,000 hrs

### **LUMEN PERFORMANCE**

#### 24V LED

WHITE 5 W p/mtr 373 lm p/mtr 5/10 m (max L)
WHITE 10 W p/mtr 714 lm p/mtr 5/10 m (max L)

SYSTEM WATTAGE & EXIT LUMENS WHITE LED TESTED AT 4000K

### **OPTIONS**

**COLOUR:** 2700K / 3000K / 4000K

PROTECTION: IP67

FLEX: End / Left / Right / Rear

**POWER FEED:** Single / Dual

DRIVER: Non Dim / DALI Dim / DMX

MOUNTING PROFILE: Raw / White / Black / Custom

PROJECT: TYPE NO.: QTY:

REV: 02/09/25 DARKON.COM.AU