
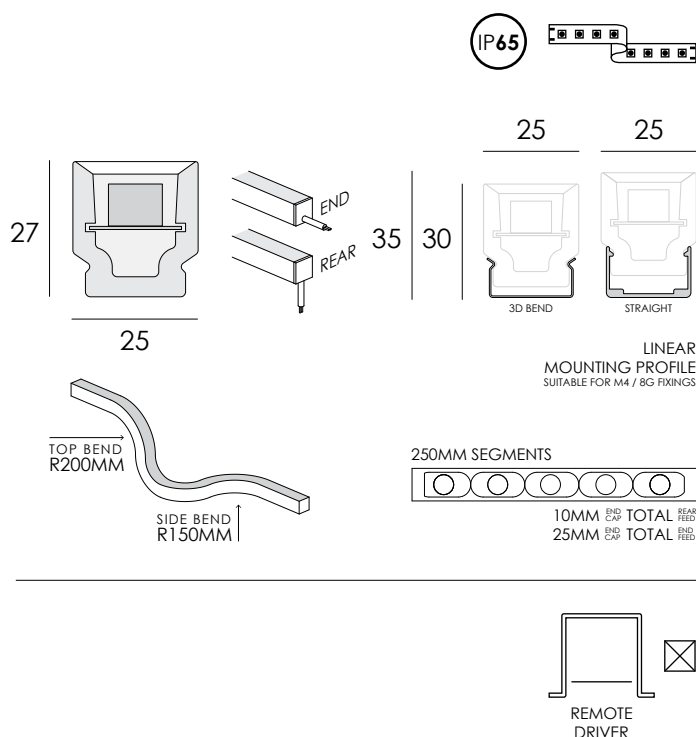


3D2527 WALL WASHER

FLEXIBLE SILICONE LED

DARKON
THE EDGE OF LIGHT

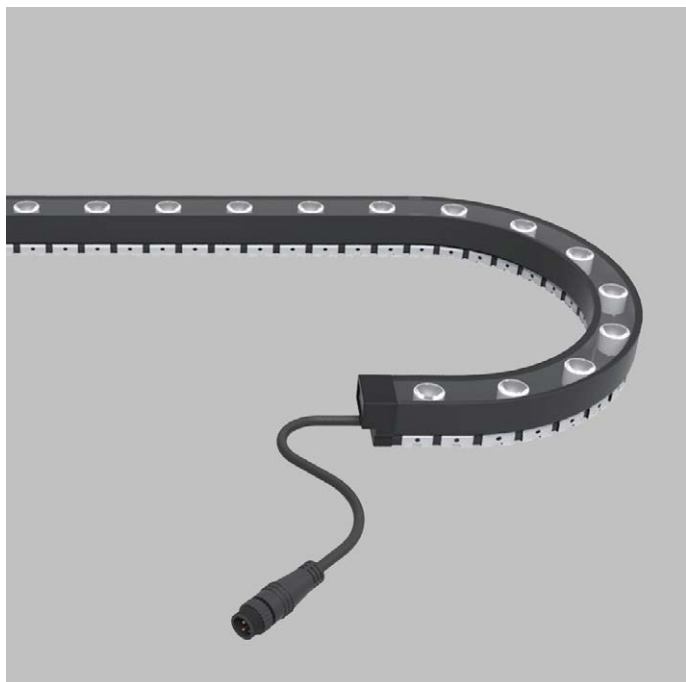

DESIGN FEATURES

- IP65 ingress protection
- Minimum bend radius of 200mm [400mm diameter] Top Bend
- Minimum bend radius of 150mm [300mm diameter] Side Bend
- Vertical & Horizontal bending in relation to illuminated face
- Single sided illumination
- Dust free matt finish
- Multiple fixed output options
- Multiple Beam options
- Up to 75 exit lumens per system watt
- 90+ colour rendering
- Max length of 5m with single power feed
- Max length of 10m with dual power feed
- Clipping profile produced in 1m lengths
- UV protected
- Saltwater and solvent resistant
- Complies with AS/NZS 60598.2.1
- 3 year warranty
- Project specific labelling referencing type numbers
- 50,000 hrs lifetime
- L70B50 > 50,000 hrs

LUMEN PERFORMANCE

24V LED

WHITE	24 W p/mtr	1572 lm p/mtr	5/10 m (max L)
TW 2700-6500K	12 W p/mtr	965 lm p/mtr	5/10 m (max L)
RGBW	24 W p/mtr	880 lm p/mtr	5/10 m (max L)
RGBW SPI	24 W p/mtr	880 lm p/mtr	5/10 m (max L)

SYSTEM WATTAGE & EXIT LUMENS

WHITE LED TESTED AT 4000K

TUNABLE WHITE TESTED AT 4000K

RGB TESTED WITH ALL CHANNELS AT FULL OUTPUT

RGBW TESTED WITH 3000K, ALL CHANNELS AT FULL OUTPUT

OPTIONS

COLOUR:	2700K / 3000K / 4000K / TW / RGBW / RGBW SPI
BEAM ANGLE:	15° / 15° / 35° / 20*55°
PROTECTION:	IP67
FLEX:	End / Rear
POWER FEED:	Single / Dual
DRIVER:	Non Dim / DALI Dim / DMX
MOUNTING PROFILE:	Raw / White / Black / Custom

3D Bend Profile only available in Stainless Steel

PROJECT:

TYPE NO.:

QTY:

REV: 18/09/25

DARKON.COM.AU