


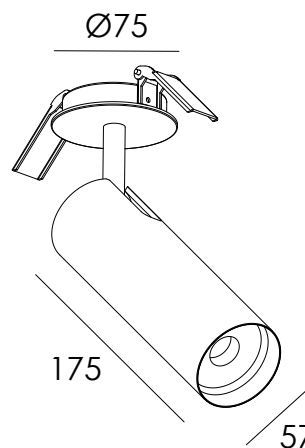

DESIGN FEATURES

- Recessed lamp for low glare applications
- Tool-free interchangeable optics
- Prismatic optics for even greater glare control
- Tapered 'knife-edge' for clean modern aesthetic
- 90° gimbal inclination
- 350° rotation
- Up to 109 exit lumens per system watt
- 80+ colour rendering
- 90+ colour rendering available on request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 55,000 hours @ 350mA / 65°C TP
- L80 / F10 = 55,000 hours @ 500mA / 65°C TP
- Standard hole saw cut out
- Spring clip mounting
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Easy to follow install guide
- Australian designed and assembled

LUMEN PERFORMANCE

TRIDONIC SLE 09mm G7 ADV LED

350mA	15.8 W	1723 lm
500mA	22.4 W	2314 lm

SYSTEM WATTAGE / EXIT LUMENS @ 10° / 4000K / 80CRI

OPTIONS

FINISH: White / Black
CURRENT: 350mA / 500mA
COLOUR TEMP: 3000K / 4000K
OPTIC: 10° / 35° / 55°
DIMMING: DALI Dim