


HIP SKIRT SUS

SUSPENDED PROFILE

DARKON

THE EDGE OF LIGHT

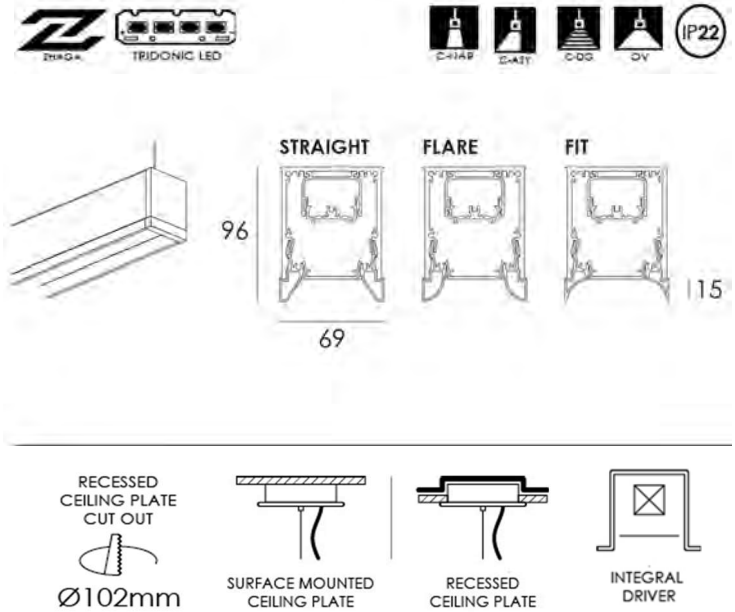

DESIGN FEATURES

- Dot free homogeneous illumination.
- Screwless end caps.
- Multiple fixed output options.
- Multiple snap fit lens options.
- Zhaga compliant.
- Up to 71 exit lumens per system watt.
- 80+ or 90+ colour rendering.
- High colour tolerance - MacAdam 3.
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Complies with AS/NZS 60598.2.1

INSTALLATION FEATURES

- Detailed shop drawings.
- Australian made.
- Supplied 100% pre-built.
- Snap fit gear tray with integrated driver.
- Plug and play wire looms.
- Sprung loaded control joints
- 5 year warranty.
- 10 year extended warranty optional.
- Project specific labelling referencing type numbers.
- Miter joints available on request.
- Welded mitre joints eliminate light bleed.

LUMEN PERFORMANCE

TRIDONIC FIXED WHITE / EXIT LUMENS

HE	350mA	1065 lm p/mtr	16 W p/mtr
HE	400mA	1218 lm p/mtr	18 W p/mtr
HE	450mA	1357 lm p/mtr	21 W p/mtr
HE	500mA	1486 lm p/mtr	23 W p/mtr
HO	350mA	2121 lm p/mtr	30 W p/mtr
HO	400mA	2424 lm p/mtr	35 W p/mtr
HO	450mA	2677 lm p/mtr	39 W p/mtr
HO	500mA	2915 lm p/mtr	43 W p/mtr

Tested with white finish @ 4000K with opal v lens.

CONFIGURATOR

- SKIRT TYPE:** Straight / Flare / Fit
- INT FINISH:** Black / White / Silver
- EXT FINISH:** Black / White / Silver / Gold
- CEILING PLATE FINISH:** White / black
- CEILING PLATE TYPE:** Surface mounted / Recessed
- SUSPENSION TYPE:** 2m wire / 4m wire
- LENS:** Opal V / Deglaring / Asymmetric / Narrow
- LED:** HE / HO / Tunable white (2700K-6500K)
- CURRENT DOWN:** 350 / 400 / 450 / 500mA
- TEMP:** 2700K / 3000K / 4000K
- DIMMING:** Non Dim / Dali Dim / Switch Dim / Dsi Dim

PROJECT:

TYPE NO:

QTY:

REV: 16/02/2021

DARKON.COM.AU