



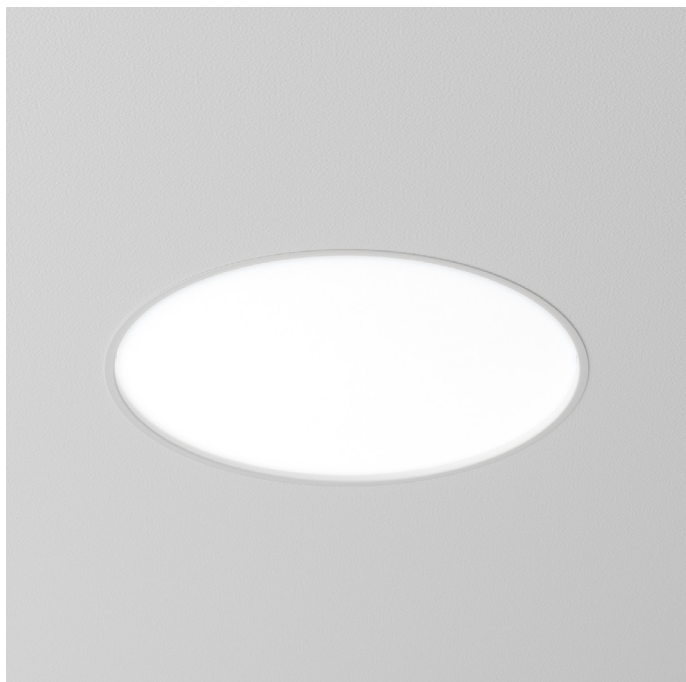

2000
ADJUSTABLE

128

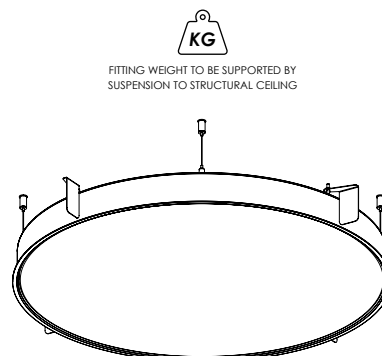

FITTING WEIGHT TO BE SUPPORTED BY
SUSPENSION TO STRUCTURAL CEILING

Ø625 / 925 / 1225

CUT OUT



Ø610 / 910 / 1210mm



INTEGRAL
DRIVER

DESIGN FEATURES

- Large opal diffuser for low glare applications
- Suspension wires required to bare weight of fitting
- Recess plaster clips pull trim flush with plaster ceiling
- up to 97 exit lumens per system watt
- 90+ colour rendering
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 350mA / 65°C TP
- L80 / F10 = 72,000 hours @ 450mA / 65°C TP
- Removable internal assembly for ease of maintenance
- Australian designed and assembled
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Easy to follow install guide

LUMEN PERFORMANCE

TRIDONIC CLE SHALLOW G2 LED

600:	225mA	33 W	3151 lm
600:	350mA	52 W	4853 lm
600:	500mA	74 W	6848 lm
900:	500mA	72 W	6904 lm
900:	775mA	111 W	10685 lm
900:	1200mA	174 W	16389 lm
1200:	500mA	133 W	12849 lm
1200:	775mA	206 W	20050 lm
1200:	1200mA	322 W	30356 lm

SYSTEM WATTAGE / EXIT LUMENS 4000K

OPTIONS

SIZE:	600 / 900 / 1200
FINISH:	White / Black
600 CURRENT:	225mA / 350mA / 500mA
900 CURRENT:	500mA / 775mA / 1200mA
1200 CURRENT:	500mA / 775mA / 1200mA
COLOUR TEMP:	3000K / 4000K
DIMMING:	Non Dim / DALI / DSI / Switch Dim
FLEX:	Flex & plug / No flex & plug