


MRS.T-G RADII SUS

SUSPENDED PROFILES


DARKON

THE EDGE OF LIGHT

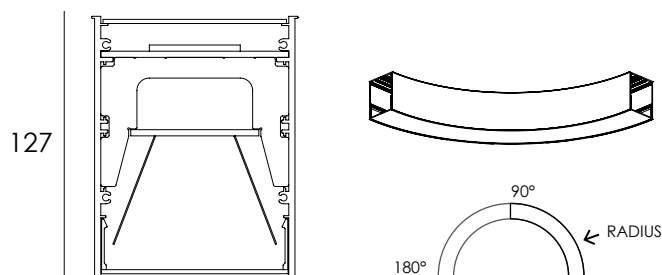


AVAILABLE IN
90° OR 180° ARCS AS STANDARD
NOTE: CUSTOM SIZES AND ANGLES REQUIRE TOOLING FEE

RADIUS IN HORIZONTAL PLANE ONLY (I.E. LENS IS DOWN)
RADIUS NOT AVAILABLE IN VERTICAL PLANE




SURFACE MOUNTED
CEILING PLATE




RECESSED
CEILING PLATE

RECESSED
CEILING PLATE
CUT OUT



Ø102mm



INTEGRAL
DRIVER

DESIGN FEATURES

- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Zhaga compliant LED
- Up to 107 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

HE	300mA	14 W p/mtr	1332 lm p/mtr
HE	350mA	16 W p/mtr	1540 lm p/mtr
HE	400mA	18 W p/mtr	1744 lm p/mtr
HE	450mA	20 W p/mtr	1943 lm p/mtr
HE	500mA	23 W p/mtr	2145 lm p/mtr
HO	300mA	26 W p/mtr	2641 lm p/mtr
HO	350mA	30 W p/mtr	3040 lm p/mtr
HO	400mA	34 W p/mtr	3422 lm p/mtr
HO	450mA	38 W p/mtr	3795 lm p/mtr
HO	500mA	43 W p/mtr	4173 lm p/mtr

TRIDONIC LLE16 FIXED WHITE LED [INDIRECT]

HE	300mA	20 W p/mtr	2341 lm p/mtr
HE	350mA	23 W p/mtr	2703 lm p/mtr
HE	400mA	27 W p/mtr	3055 lm p/mtr
HE	450mA	30 W p/mtr	3396 lm p/mtr
HE	500mA	34 W p/mtr	3727 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- FINISH:** White / Black
CEILING PLATE FINISH: White / Black
CEILING PLATE TYPE: Surface Mounted / Recessed
SUSPENSION TYPE: 2m Wire / 4m Wire
LENS: Opal V
LED [DIRECT]: HE / HO / Tunable white (2700K-6500K)
CURRENT [DIRECT]: 300 / 350 / 400 / 450 / 500mA
LED [INDIRECT]: HE
CURRENT [INDIRECT]: 300 / 350 / 400 / 450 / 500mA
COLOUR TEMP: 2700K / 3000K / 4000K
UP / DOWN: Single Control / Separately Controlled
DIMMING: Non Dim / DALI / DSI / Switch Dim

NOTES: R428MM REQUIRES REMOTE DRIVER

PROJECT:

TYPE NO.:



QTY:

REV: 14/10/25

DARKON.COM.AU




STANDARD RADII SIZES

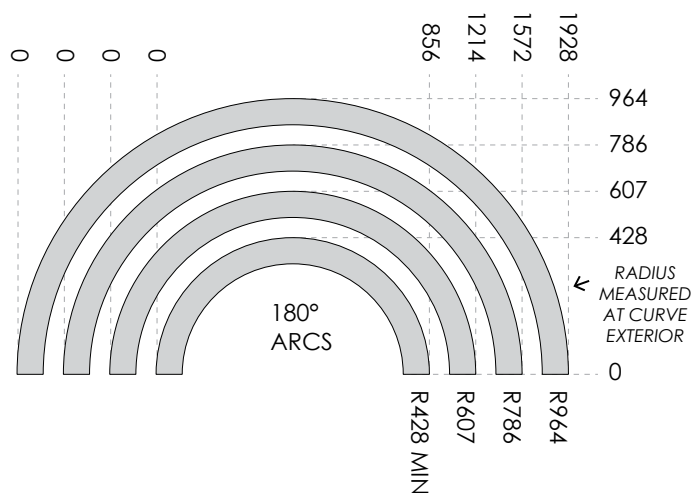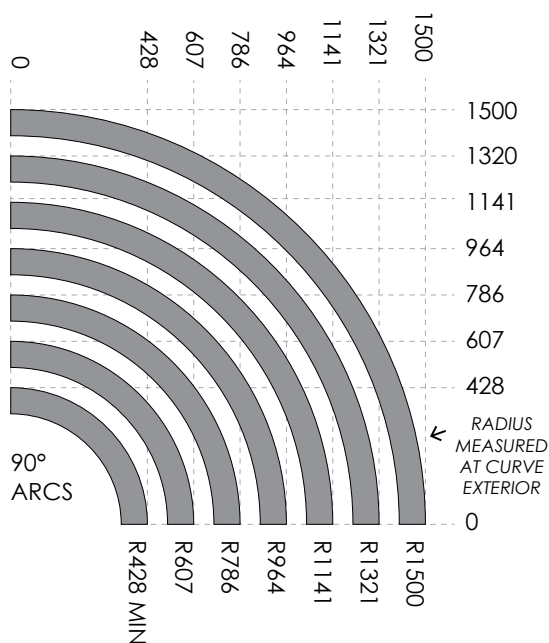


NOTE: CUSTOM SIZES & ANGLES REQUIRE TOOLING FEE

EXAMPLES OF OPEN SHAPES

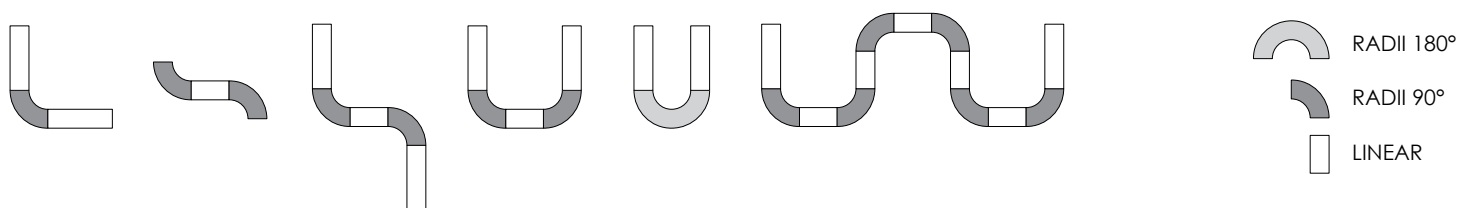

EXAMPLES OF CLOSED SHAPES

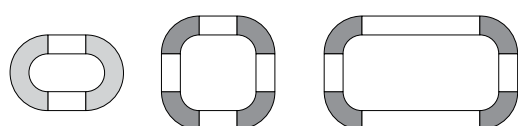

PROJECT:

TYPE NO.:

QTY:

REV: 14/10/25

DARKON.COM.AU