
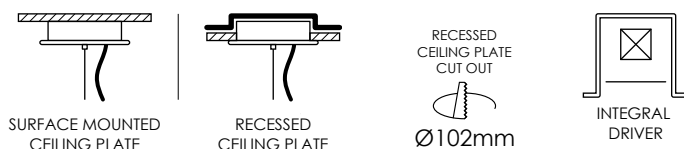


SLIM TRADIE UP SUS

SUSPENDED PROFILES

DARKON

THE EDGE OF LIGHT

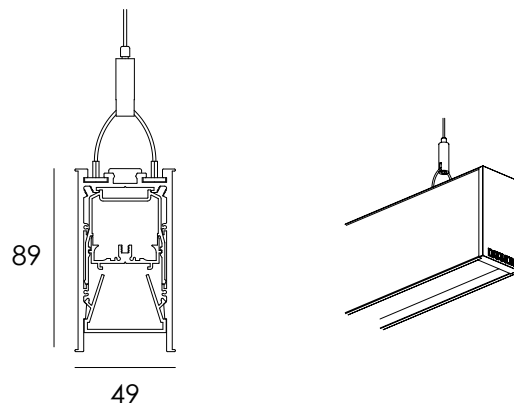

DESIGN FEATURES

- Sliding 'Y' sus detail for adjustable suspension spacing
- Recessed lens to help reduce glare
- Lap join milling for Light Bleed free joints
- Integrated uplight
- Low glare UGR≤19
- Dot free homogeneous illumination
- Multiple fixed output options
- Multiple snap fit lens options
- Zhaga compliant
- Up to 95 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance - MacAdam 3
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Complies with AS/NZS 60598.2.1

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Snap fit gear tray with integrated driver
- Plug and play wire looms
- Sprung loaded control joints
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Miter joints available
- Welded mitre joints eliminate light bleed
- Factory fitted "push to join" installation

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

HE CRI90	200mA	828 lm p/mtr	10 W p/mtr
HE CRI90	250mA	1028 lm p/mtr	12 W p/mtr
HE CRI90	300mA	1225 lm p/mtr	14 W p/mtr
HE CRI90	350mA	1414 lm p/mtr	16 W p/mtr
HE CRI90	400mA	1601 lm p/mtr	18 W p/mtr
HE CRI90	450mA	1785 lm p/mtr	21 W p/mtr
HE CRI90	500mA	1968 lm p/mtr	23 W p/mtr

HO CRI90	200mA	1652 lm p/mtr	17 W p/mtr
HO CRI90	250mA	2039 lm p/mtr	21 W p/mtr
HO CRI90	300mA	2415 lm p/mtr	26 W p/mtr
HO CRI90	350mA	2780 lm p/mtr	30 W p/mtr
HO CRI90	400mA	3135 lm p/mtr	34 W p/mtr
HO CRI90	450mA	3473 lm p/mtr	38 W p/mtr
HO CRI90	500mA	3823 lm p/mtr	43 W p/mtr

T1607 NEON LED [INDIRECT]

HE CRI90	24V	1228 lm p/mtr	12 W p/mtr
----------	-----	---------------	------------

SYSTEM WATTAGE & EXIT LUMENS

TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- FINISH:** White / Black / Silver / Gold / Custom
- CEILING PLATE FINISH:** White / Black
- CEILING PLATE TYPE:** Surface Mounted / Recessed
- SUSPENSION TYPE:** 2m Wire / 4m Wire / White Rod / Black Rod
- LENS DOWN:** Opal V / Deglaring / Asymmetric / Narrow
- LED DOWN:** HE / HO / Tunable white
- CURRENT DOWN:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- COLOUR TEMP DOWN:** 2700K / 3000K / 4000K / TW 2700-6500K
- LED UP:** T1607 Neon
- COLOUR TEMP UP:** 2700K / 3000K / 4000K
- DIMMING:** Non Dim / DALI / DSI / Switch Dim / Casambi

PROJECT:

TYPE NO.:

QTY:

REV: 20/02/26

DARKON.COM.AU