STRAIGHT T SUS SUSPENDED PROFILE




INTEGRAL DRIVER

DARKON.COM.AU

RECESSED



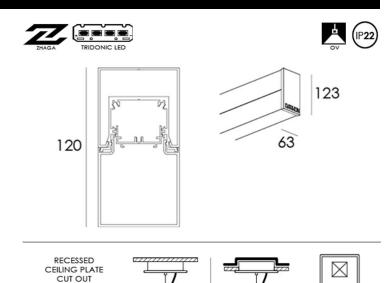

DESIGN FEATURES

- Dot free homogeneous illumination.
- •Screwless end caps.
- Multiple fixed output options.
- Zhaga compliant.
- •Up to 136 exit lumens per system watt.
- •80+ or 90+ colour rendering.
- High colour tolerance MacAdam 3.
- •L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- •Complies with AS/NZS 60598.2.1

INSTALLATION FEATURES

- Detailed shop drawings.
- Australian made.

Ø102mm

- •Supplied 100% pre-built.
- •Snap fit gear tray with integrated driver.
- •5 year warranty.
- •10 year extended warranty optional.
- Project specific labelling referencing type numbers.

SURFACE MOUNTED

- Approximate fitting weight of 3.1 Kg per/m.
- •Only single body lengths available.
- •Miter joins are not available.

LUMEN PERFORMANCE

TRIDONIC FIXED WHITE / EXIT LUMENS

HE	350mA	2041 lm p/mtr	16 W p/mtr
HE	400mA	2336 lm p/mtr	18 W p/mtr
HE	450mA	2602 lm p/mtr	21 W p/mtr
HE	500mA	2850 lm p/mtr	23 W p/mtr
НО	350mA	4068 lm p/mtr	30 W p/mtr
НО	400mA	4648 lm p/mtr	35 W p/mtr
НО	450mA	5134 lm p/mtr	39 W p/mtr
НО	500mA	5590 lm p/mtr	43 W p/mtr

Tested with white finish @ 4000K with opal v lens.

REV: 27/01/2022

CONFIGURATOR

FINISH: Black / White / Silver

CEILING PLATE FINISH: White / black

CEILING PLATE TYPE: Surface mounted / Recessed

SUSPENSION TYPE: 2m wire / 4m wire / White rod / Black rod

LENS: Opal V

LED: HE / HO / Tunable white (2700K-6500K)

CURRENT DOWN: 350 / 400 / 450 / 500mA **TEMP:** 2700K / 3000K / 4000K

DIMMING: Non Dim / Dali Dim / Switch Dim / Dsi Dim

TYPE NO: PROJECT: QTY: