SWARM THREE SM IT SURFACE MOUNTED LUMINAIRES












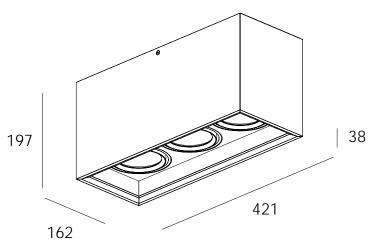



DESIGN FEATURES

- Recessed lamp for low glare applications
- Integral driver ideal for ceilings with no cavity 30° gimbal inclination
- 360° gimbal rotation
- 99 lumens per watt (lamp flux)
- 80+ colour rendering
- Complies with AS/NZS 60598.2.1

INSTALLATION FEATURES

- · Spring clip mounting
- Australian designed and assembled Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optionalProject specific labelling referencing type numbers
- Easy to follow install guide

LUMEN PERFORMANCE

CREE COB LED

700mA 3x 28.1W 3x 2794 lm SYSTEM WATTAGE / EXIT LUMENS @ 30° / 4000K

OPTIONS

FINISH: White / black CURRENT: 700mA **COLOUR TEMP:** 3000K / 4000K **OPTIC:** 15° / 24° / 30°

DIMMING: Non Dim / DALI / DSI / Switch Dim FLEX: Flex & plug / No flex & plug

TYPE NO.: PROJECT: QTY:

REVISION:30/09/21 DARKON.COM.AU