

T1607 NEON FLEXIBLE SILICONE LED





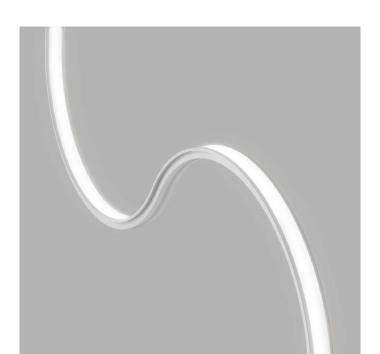

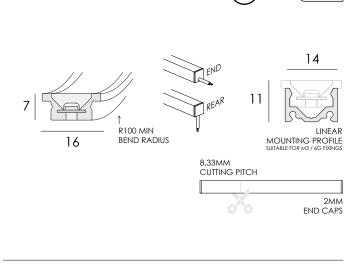

DESIGN FEATURES

- In-house length customisation
- In-house moulded end caps
- IP67 ingress protection
- Minimum bend radius of 100mm [200mm diameter]
- Vertical bending in relation to illuminated face
- Dot free homogeneous illumination
- Dust free matt finish
- Trim for joinery mounting
- · Up to 107 exit lumens per system watt
- 90+ colour rendering
- Max length 5 meters with single power feed
- Max length doubles with dual power feed
- UV protected
- Saltwater and solvent resistant

- Complies with AS/NZS 60598.2.1
- 3 year warranty
- Project specific labelling referencing type numbers
- 50,000 hrs lifetime
- L70B50 > 50,000 hrs

LUMEN PERFORMANCE

24V 2835 LED

2700/3000/4000K (cv) 11.5 W p/mtr 1228 lm p/mtr 5/10 m (max L)

SYSTEM WATTAGE & EXIT LUMENS WHITE LED TESTED AT 4000K

CONFIGURATOR

COLOUR: 2700K / 3000K / 4000K

PROTECTION: IP67

FLEX: End / Rear

POWER FEED: Single / Dual

DRIVER: Non Dim / DALI Dim

MOUNTING PROFILE: White / Black / Custom

PROJECT: TYPE NO.: QTY: