
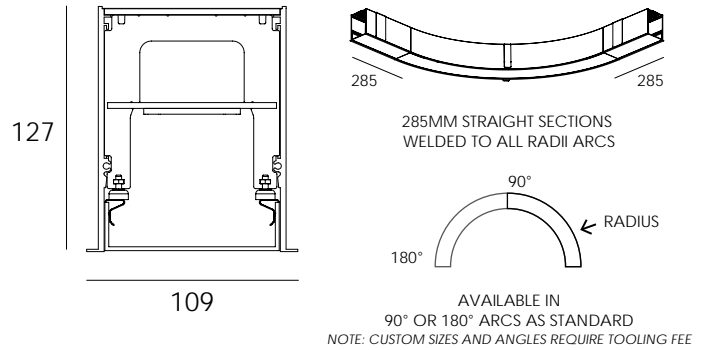


# TRIM RADII REC


RECESSED PROFILES

# DARKON

THE EDGE OF LIGHT



RADIUS IN HORIZONTAL PLANE ONLY (I.E. LENS IS DOWN)  
RADIUS NOT AVAILABLE IN VERTICAL PLANE



## DESIGN FEATURES

- Custom radius available
- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Zhaga compliant LED
- Up to 83 exit lumens per system watt
- 80+ or 90+ colour rendering
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA

## INSTALLATION FEATURES

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Plug and Play wire looms
- Sprung loaded control joints
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

## LUMEN PERFORMANCE

### TRIDONIC LLE24 FIXED WHITE G5 LED

|    |       |            |               |
|----|-------|------------|---------------|
| HE | 350mA | 16 W p/mtr | 1256 lm p/mtr |
| HE | 400mA | 18 W p/mtr | 1438 lm p/mtr |
| HE | 450mA | 21 W p/mtr | 1602 lm p/mtr |
| HE | 500mA | 23 W p/mtr | 1755 lm p/mtr |
| HO | 350mA | 30 W p/mtr | 2504 lm p/mtr |
| HO | 400mA | 35 W p/mtr | 2861 lm p/mtr |
| HO | 450mA | 39 W p/mtr | 3160 lm p/mtr |
| HO | 500mA | 43 W p/mtr | 3441 lm p/mtr |

SYSTEM WATTAGE & EXIT LUMENS  
TESTED WITH OPAL V / WHITE FINISH / 4000K

## CONFIGURATOR

**FINISH:** White / black  
**LENS:** Opal V  
**LED:** HE / HO / Tunable white (2700K-6500K)  
**CURRENT:** 350mA / 400mA / 450mA / 500mA  
**COLOUR TEMP:** 2700K\* / 3000K / 4000K  
**DIMMING:** Non Dim / DALI / DSI / Switch Dim

**NOTES:** R433MM REQUIRES REMOTE DRIVER  
2700K AVAILABLE FOR SIZES R791 AND ABOVE

PROJECT:



TYPE NO.:

QTY:

REV: 18/05/21


DARKON.COM.AU

## STANDARD RADII SIZES

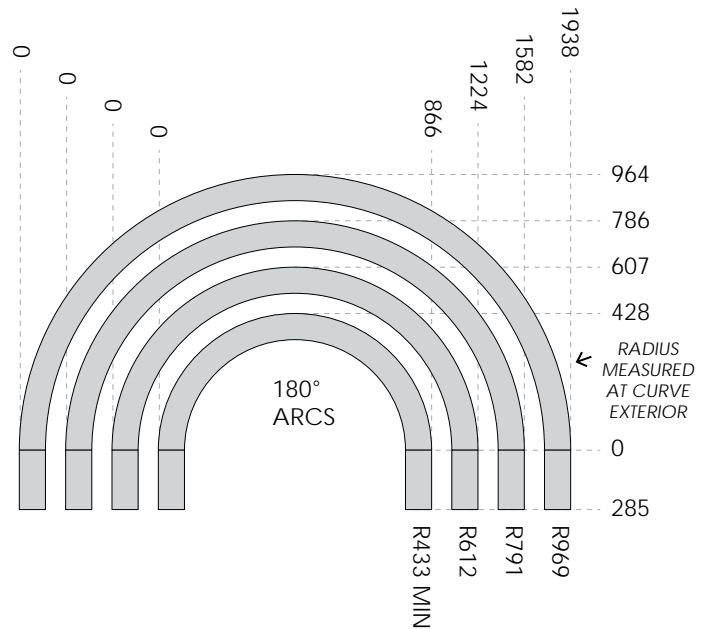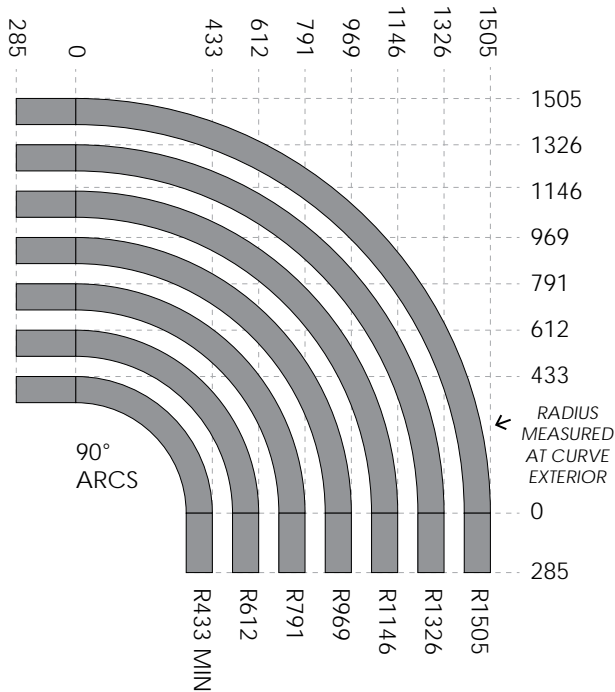

NOTE: CUSTOM SIZES & ANGLES REQUIRE TOOLING FEE

## EXAMPLES OF OPEN SHAPES

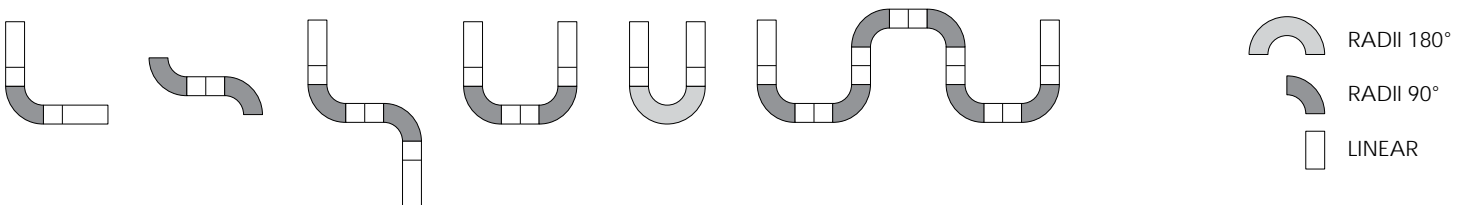

## EXAMPLES OF CLOSED SHAPES

