
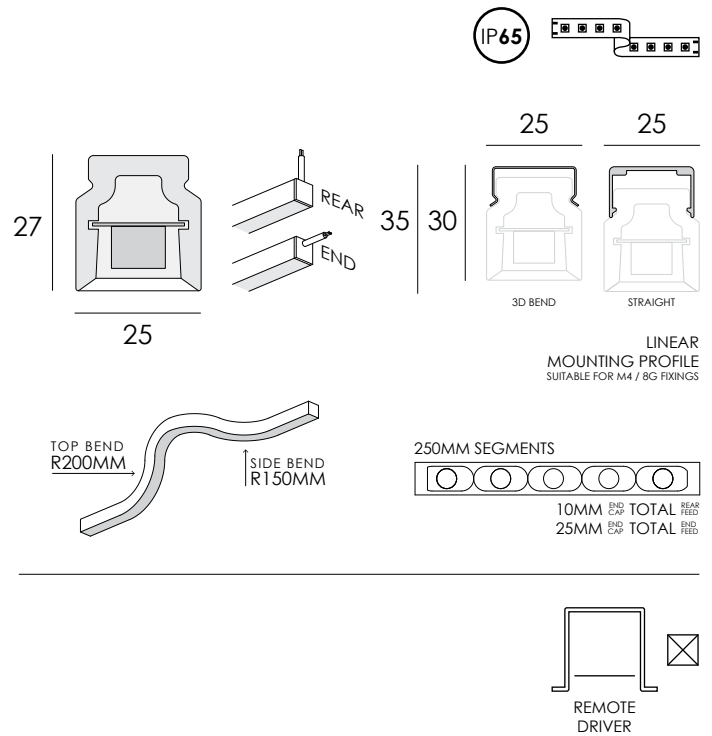


# WALL WASHER 3D2527

FLEXIBLE SILICONE LED

# DARKON

THE EDGE OF LIGHT

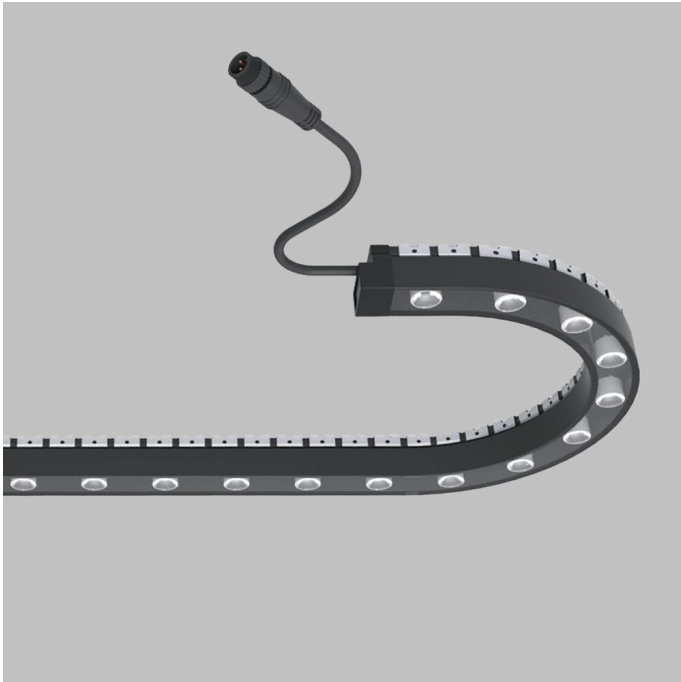

## DESIGN FEATURES

- IP65 ingress protection
- Minimum bend radius of 200mm [400mm diameter] Top Bend
- Minimum bend radius of 150mm [300mm diameter] Side Bend
- Vertical & Horizontal bending in relation to illuminated face
- Single sided illumination
- Dust free matt finish
- Multiple fixed output options
- Multiple Beam options
- Up to 75 exit lumens per system watt
- 90+ colour rendering
- Max length of 5m with single power feed
- Max length of 10m with dual power feed
- Clipping profile produced in 1m lengths
- UV protected
- Saltwater and solvent resistant
- Complies with AS/NZS 60598.2.1
- 3 year warranty
- Project specific labelling referencing type numbers
- 50,000 hrs lifetime
- L70B50 > 50,000 hrs

## LUMEN PERFORMANCE

### 24V LED

WHITE	24 W p/mtr	1572 lm p/mtr	5/10 m (max L)
TW 2700-6500K	12 W p/mtr	965 lm p/mtr	5/10 m (max L)
RGBW	24 W p/mtr	880 lm p/mtr	5/10 m (max L)
RGBW SPI	24 W p/mtr	880 lm p/mtr	5/10 m (max L)

SYSTEM WATTAGE & EXIT LUMENS

WHITE LED TESTED AT 4000K

TUNABLE WHITE TESTED AT 4000K

RGB TESTED WITH ALL CHANNELS AT FULL OUTPUT

RGBW TESTED WITH 3000K, ALL CHANNELS AT FULL OUTPUT

## OPTIONS

- COLOUR:** 2700K / 3000K / 4000K / TW / RGBW / RGBW SPI
- BEAM ANGLE:** 15° / 25° / 35° / 20\*55°
- PROTECTION:** IP67
- FLEX:** End / Rear
- POWER FEED:** Single / Dual
- DRIVER:** Non Dim / DALI Dim / DMX
- MOUNTING PROFILE:** Raw / White / Black / Custom
- 3D Bend Profile only available in Stainless Steel*

PROJECT:

TYPE NO.:

QTY:

REV: 28/04/26

DARKON.COM.AU