


WYN IP22 SM

SURFACE MOUNTED PROFILE

DARKON

THE EDGE OF LIGHT

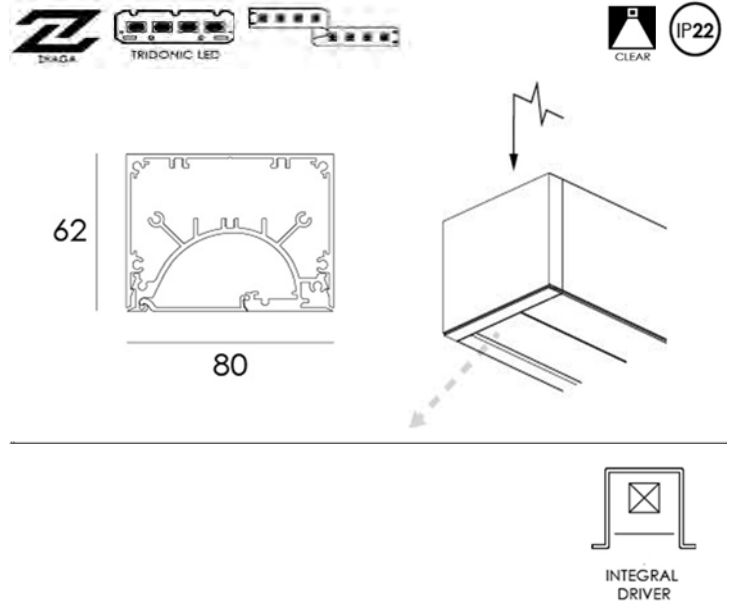

DESIGN FEATURES

- Dot free homogeneous illumination.
- Screwless end caps.
- Multiple fixed output options.
- Multiple snap fit lens options.
- Up to 87 exit lumens per system watt.
- 80+ or 90+ colour rendering.
- High colour tolerance - MacAdam 3.
- Complies with AS/NZS 60598.2.1

INSTALLATION FEATURES

- Detailed shop drawings.
- Australian made.
- Supplied 100% pre-built.
- 5 year warranty.
- 10 year extended warranty optional.
- Project specific labelling referencing type numbers.

LUMEN PERFORMANCE

TRIDONIC FIXED WHITE / EXIT LUMENS

HE	200mA	1089 lm p/mtr	13 W p/mtr
HE	250mA	1345 lm p/mtr	16 W p/mtr
HE	300mA	1610 lm p/mtr	20 W p/mtr
HE	350mA	1845 lm p/mtr	23 W p/mtr
HE	400mA	2100 lm p/mtr	26 W p/mtr
HE	450mA	2321 lm p/mtr	30 W p/mtr
HE	500mA	2536 lm p/mtr	33 W p/mtr
HO	200mA	1476 lm p/mtr	17 W p/mtr
HO	250mA	1846 lm p/mtr	22 W p/mtr
HO	300mA	2206 lm p/mtr	26 W p/mtr
HO	350mA	2521 lm p/mtr	30 W p/mtr
HO	400mA	2866 lm p/mtr	34 W p/mtr
HO	450mA	3204 lm p/mtr	39 W p/mtr
HO	500mA	3482 lm p/mtr	43 W p/mtr

DPAL TAPE / EXIT LUMENS

DPAL20	24V	Pending test results
DPAL60	24V	Pending test results

Tested with white finish @ 4000K with clear lens.

CONFIGURATOR

MOUNTING: Surface mounted / Edge (see page two)

FINISH: Black / White / Silver

LENS: Clear Lens

LED: HE / HO / DPAL20 / DPAL60 / RGBW HE / RGBW HO

CURRENT DOWN: 200 / 250 / 300 / 350 / 400 / 450 / 500mA

HE / HO TEMP: 2700K / 3000K / 4000K

DPAL TEMP: 3000K / 4000K

DIMMING: Non Dim / Dali Dim / Switch Dim / Dsi Dim

PROJECT:


TYPE NO:

QTY:

REV: 23/04/2021

DARKON.COM.AU

SURFACE MOUNT ORIENTATIONS

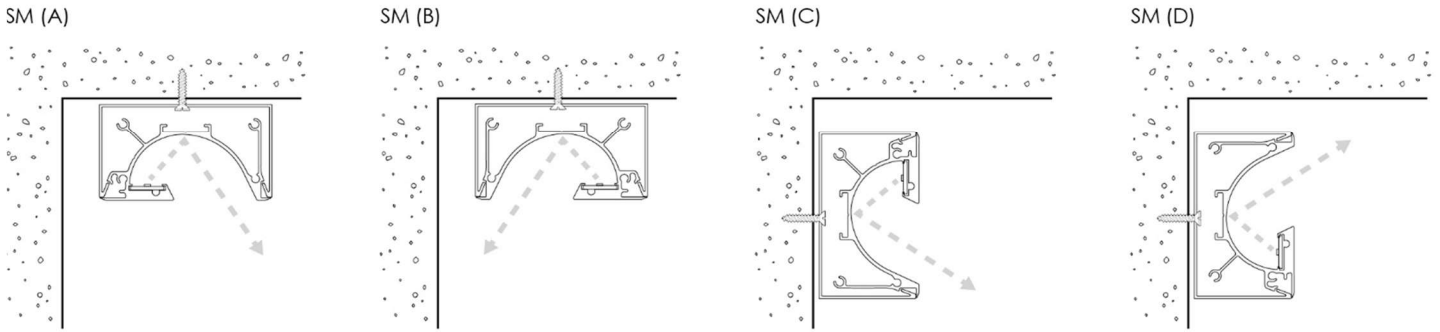

EDGE MOUNT ORIENTATIONS

