


WYN LED WALL MK2

SURFACE MOUNTED PROFILES

DARKON

THE EDGE OF LIGHT

IP22 LED

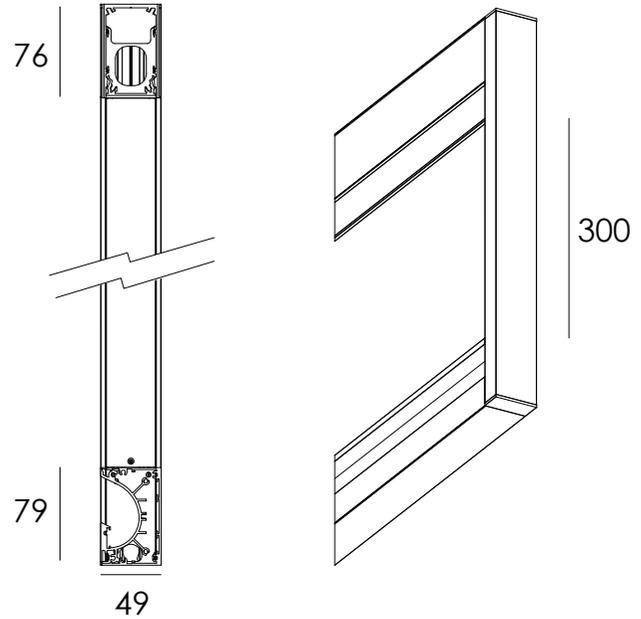

WYNWALL is an indirect luminare mounted on a fixed 300mm long outreach arm with asymmetrical light distribution making it ideal for wall or ceiling washing applications. Integral driver located inside the wall mounted body.

DESIGN FEATURES

- Dot free homogeneous illumination
- Up to 80 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance - MacAdam 3
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Complies with AS/NZS 60598.2.1

INSTALLATION FEATURES

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers

SPECIFICATIONS

TRIDONIC STARK LLE16 FIXED WHITE / EXIT LUMENS (INDIRECT)

HE	350mA:	26.9W	p/mtr	2,316	lm p/mtr
HE	400mA:	31.2W	p/mtr	2,626	lm p/mtr
HE	450mA:	35.8W	p/mtr	2,892	lm p/mtr
HE	500mA:	40.0W	p/mtr	3,152	lm p/mtr
HO	350mA:	35.0W	p/mtr	3,024	lm p/mtr
HO	400mA:	40.5W	p/mtr	3,428	lm p/mtr
HO	450mA:	46.9W	p/mtr	3,772	lm p/mtr
HO	500mA:	52.1W	p/mtr	4,104	lm p/mtr

NOTE: SYSTEM WATTAGE / EXIT LUMENS @ 4K

CONFIGURATOR

FINISH:	Black / White / Silver
LED:	HE / HO
CURRENT:	350 / 400 / 450 / 500mA
TEMP:	3000K / 4000K
DIMMING:	DALI / SwitchDIM / DSI

PROJECT:

LUMINAIRE REF:

QTY:

SPECIFIER DETAILS:

REV: 04/04/23

DARKON.COM.AU