

## DESIGN FEATURES

- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Up to 92 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance - MacAdam 3
- Complies with AS/NZS 60598.2.1

## INSTALLATION FEATURES

- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Miter joints available
- Welded mitre joints eliminate light bleed
- Approximate fitting weight of 2.4 Kg per/m.

## LUMEN PERFORMANCE

### TRIDONIC FIXED WHITE / EXIT LUMENS

HE CRI90	200mA	1196 lm p/mtr	13 W p/mtr
HE CRI90	250mA	1479 lm p/mtr	16 W p/mtr
HE CRI90	300mA	1755 lm p/mtr	19 W p/mtr
HE CRI90	350mA	2023 lm p/mtr	23 W p/mtr
HE CRI90	400mA	2284 lm p/mtr	26 W p/mtr
HE CRI90	450mA	2537 lm p/mtr	29 W p/mtr
HE CRI90	500mA	2786 lm p/mtr	32 W p/mtr
HO CRI90	350mA	2637 lm p/mtr	29 W p/mtr
HO CRI90	400mA	2975 lm p/mtr	34 W p/mtr
HO CRI90	450mA	3303 lm p/mtr	38 W p/mtr
HO CRI90	500mA	3635 lm p/mtr	43 W p/mtr

### DPAL TAPE / EXIT LUMENS

DPAL20	24V	337 lm p/mtr	8 W p/mtr
DPAL60	24V	337 lm p/mtr	18 W p/mtr

Tested with white finish @ 4000K.

## CONFIGURATOR

**MOUNTING:** Surface mounted / Edge (see page two)

**FINISH:** Black / White / Silver

**LED:** HE / HO / DPAL20 / DPAL60 / RGBW HE / RGBW HO

**CURRENT:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA

**TEMP:** 2700K / 3000K / 4000K

**DIMMING:** Non dim / DALI dim / SwitchDIM / DSI dim

PROJECT:


TYPE NO:

QTY:

REV: 26/06/2023

DARKON.COM.AU

## SURFACE MOUNT ORIENTATIONS

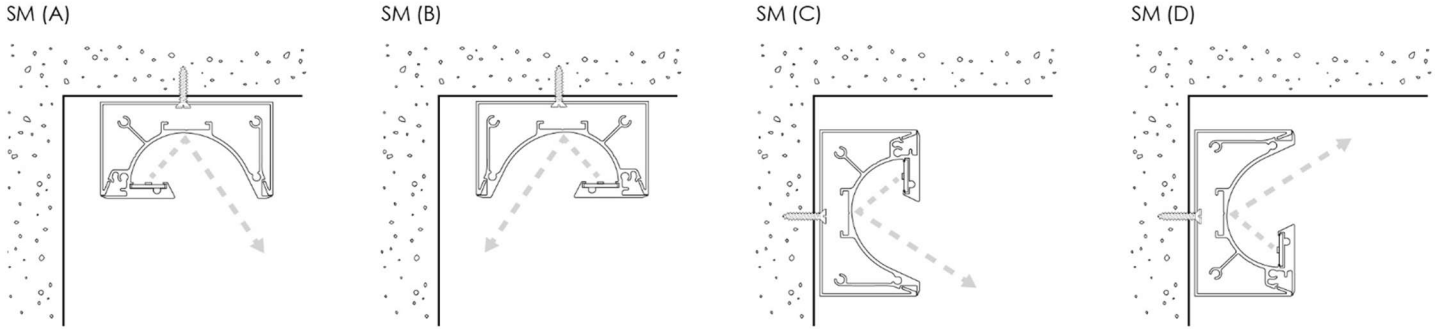

## EDGE MOUNT ORIENTATIONS

