


IP22 LED

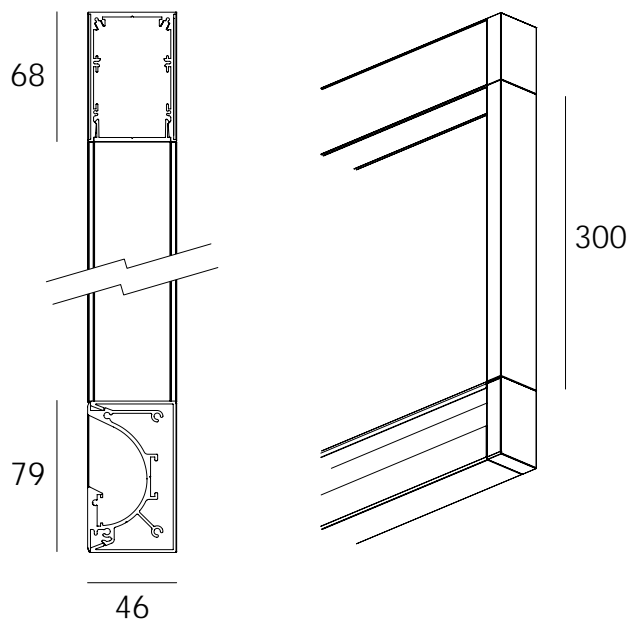

WYN WALL is an indirect luminaire mounted on a fixed 300mm long outreach arm with asymmetrical light distribution making it ideal for wall or ceiling washing applications. Integral driver located inside the wall mounted body.

SPECIFICATIONS

COLOUR

WHITE / BLACK / SILVER / CUSTOM

LAMP

TRIDONIC STARK LLE16 HE / HO G4

OUTPUT P/MTR

HE 350mA: 26.9W p/mtr 2,316 lm p/mtr

HE 400mA: 31.2W p/mtr 2,626 lm p/mtr

HE 450mA: 35.8W p/mtr 2,892 lm p/mtr

HE 500mA: 40.0W p/mtr 3,152 lm p/mtr

HO 350mA: 35.0W p/mtr 3,024 lm p/mtr

HO 400mA: 40.5W p/mtr 3,428 lm p/mtr

HO 450mA: 46.9W p/mtr 3,772 lm p/mtr

HO 500mA: 52.1W p/mtr 4,104 lm p/mtr

NOTE: SYSTEM WATTAGE / EXIT LUMENS @ 4K

COLOUR TEMP

3000K / 4000K

OPTICS

ASYMMETRICAL LIGHT DISTRIBUTION

DIMMING

DALI / DSI / SWITCH DIM

MOUNTING OPTIONS

REC / SM

CODE NAME

NAME:

WYN LED

GENERATION:

MK2

LENGTH:

LENGTH CUST:

MOUNTING:

WALL

COLOUR:

WHT

BLK

SLV

CUST

COLOUR CUST:

OUTPUT:

HE

HO

CURRENT:

350mA

400mA

450mA

500mA

COLOUR TEMP:

3K

4K

DIMMING:

NON DIM

DIM

FLEX:

NO PLUG

FLEX & PLUG

EXAMPLE CODE NAME

WYN LED / MK2 / 610 / WALL / WHT + HE / 350mA / 3K / DIM / FLEX & PLUG

PROJECT:

LUMINAIRE REF:

QTY:

SPECIFIER DETAILS: