


HIP H LP SKIRT SUS

SUSPENDED PROFILES

DARKON


THE EDGE OF LIGHT

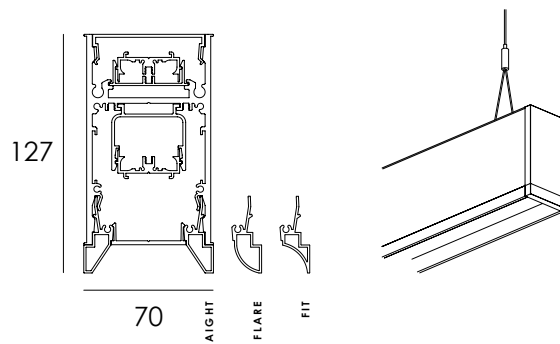

SURFACE MOUNTED
CEILING PLATE



RECESSED
CEILING PLATE



RECESSED
CEILING PLATE
CUT OUT
Ø102mm



INTEGRAL
DRIVER

DESIGN FEATURES

- Dot free homogeneous illumination
- Screwless end caps
- Multiple fixed output options
- Multiple snap fit lens options
- Zhaga compliant LED
- Up to 71 exit lumens per system watt
- 90+ colour rendering, 80+ available upon request
- High colour tolerance Macadam 3
- Complies with AS/NZS 60598.2.1
- L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- Detailed shop drawings
- Australian made
- Supplied 100% pre-built
- Snap fit gear tray with integrated driver
- Plug and Play wire looms
- Sprung loaded control joints
- 5 year warranty
- 10 year extended warranty optional
- Project specific labelling referencing type numbers
- Miter joints available on request
- Welded mitre joints eliminate light bleed

LUMEN PERFORMANCE

TRIDONIC LLE24 FIXED WHITE LED [DIRECT]

HE	350mA	16 W p/mtr	1065 lm p/mtr
HE	400mA	18 W p/mtr	1218 lm p/mtr
HE	450mA	21 W p/mtr	1357 lm p/mtr
HE	500mA	23 W p/mtr	1486 lm p/mtr
HO	300mA	30 W p/mtr	2121 lm p/mtr
HO	350mA	35 W p/mtr	2424 lm p/mtr
HO	400mA	39 W p/mtr	2677 lm p/mtr
HO	500mA	43 W p/mtr	2915 lm p/mtr

TRIDONIC LLE24 FIXED WHITE LED [INDIRECT]

HE	200mA	10 W p/mtr	930 lm p/mtr
HE	350mA	16 W p/mtr	1586 lm p/mtr
HO	200mA	17 W p/mtr	1868 lm p/mtr
HO	350mA	30 W p/mtr	3139 lm p/mtr

SYSTEM WATTAGE & EXIT LUMENS
TESTED WITH OPAL V / WHITE FINISH / 4000K

OPTIONS

- SKIRT TYPE:** Straight / Flare / Fit
- FINISH:** White / Black / Silver / Gold / Custom
- SKIRT FINISH:** White / Black / Silver / Gold / Custom
- CEILING PLATE FINISH:** White / Black
- CEILING PLATE TYPE:** Surface Mounted / Recessed
- SUSPENSION TYPE:** 2m Wire / 4m Wire
- LENS DOWN:** Opal V / Deglaring / Asymmetric / Narrow
- LED DOWN:** HE / HO / Tunable white
- CURRENT DOWN:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- LENS UP:** Opal V / Deglaring / Asymmetric / Narrow
- LED UP:** HE / HO / Tunable white
- CURRENT UP:** 200 / 250 / 300 / 350 / 400 / 450 / 500mA
- COLOUR TEMP:** 2700K / 3000K / 4000K / (2700K-6500K)
- UP / DOWN:** Single Control / Separately Controlled
- DIMMING:** Non Dim / DALI / DSI / Switch Dim / Casambi

PROJECT:

TYPE NO.:

QTY:

REV: 20/01/26

DARKON.COM.AU