
## MRS MINI SKIRT SUS SUSPENDED PROFILE





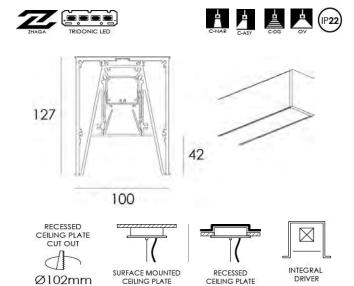

## **DESIGN FEATURES**

- •Dot free homogeneous illumination.
- •Screwless end caps.
- Multiple fixed output options.
- Multiple snap fit lens options.
- Zhaga compliant.

REV: 7/07/2020

- •Up to 82 exit lumens per system watt.
- •80+ or 90+ colour rendering.
- High colour tolerance MacAdam 3.
- •L80 / F10 = 72,000 hours @ 450mA / 75°C TA
- •Complies with AS/NZS 60598.2.1

## INSTALLATION FEATURES

- •Detailed shop drawings.
- Australian made.
- •Supplied 100% pre-built.
- •Snap fit gear tray with integrated driver.
- •5 year warranty.
- •10 year extended warranty optional.
- Project specific labelling referencing type numbers.
- •Miter joints available on request.
- •Welded mitre joins eliminate light bleed.
- •Fixed lengths only. No miter joints.

## LUMEN PERFORMANCE **CONFIGURATOR**

TRIDONIC FIXED WHITE / EXIT LUMENS			
HE	350mA	1237 lm p/mtr	16 W p/mtr
HE	400mA	1416 lm p/mtr	18 W p/mtr
HE	450mA	1576 lm p/mtr	21 W p/mtr
HE	500mA	1727 lm p/mtr	23 W p/mtr
НО	350mA	2466 lm p/mtr	30 W p/mtr
НО	400mA	2817 lm p/mtr	35 W p/mtr
НО	450mA	3111 lm p/mtr	39 W p/mtr
НО	500mA	3388 lm p/mtr	43 W p/mtr
Tested with white finish @ 4000K with opal v lens.			

INT FINISH: Black / White / Silver / Gold EXT FINISH: Black / White / Silver CEILING PLATE FINISH: White / black CEILING PLATE TYPE: Surface mounted / Recessed SUSPENSION TYPE: 2m wire / 4m wire / White rod / Black rod LENS: Opal V / Deglaring / Asymmetric / Narrow LED: HE / HO / Tunable white (2700K-6500K) CURRENT DOWN: 350 / 400 / 450 / 500mA TEMP: 2700K / 3000K / 4000K DIMMING: Non Dim / Dali Dim / Switch Dim / Dsi Dim

DARKON.COM.AU

PROJECT: TYPE NO: QTY: